Coloring Excellence -
Providing Total Paint Solutions

GODAVRI PAINTS

# GODAVRI - FLOOR COAT EMULSION

Godavri Paint's Floor Coat Emulsion is a special paint that protect and beautifies the exterior flooring from algal and fungal attack. Formulated and modified for high abrasion resistance, the product can be used on drive ways, walk ways, cement tiles or any plain cement surface. Godavri Floor coat Emulsion does not only provides a glossy finish to the surface but also resistance to abrasion from human & vehicular traffic, sun, rain and fungal attack.

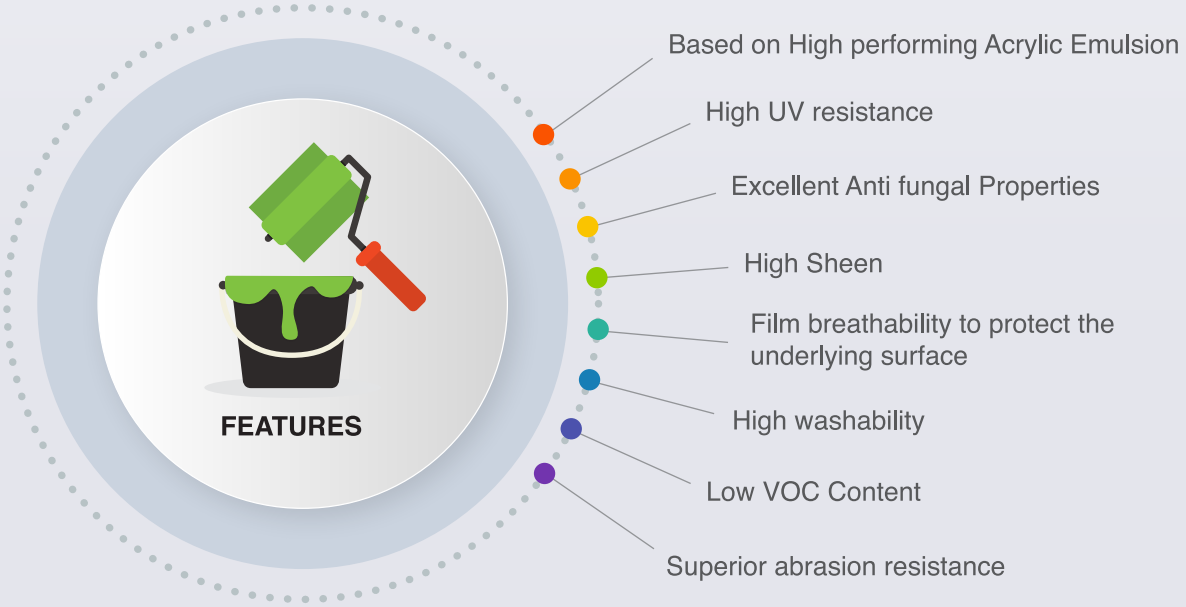

GODAVRI PAINTS

## TECHNICAL DATA

| | |
|---|---|
| Area Of Application | Terrace floor, Cement tiles, walkways, drive ways etc |
| Method Of Application | Brush, Roller, Spray |
| Consistency | Smooth |
| Finish | High sheen |
| Recommended Thinner | Potable Water |
| Viscosity | 120+10 KU |
| Drying Time | Surface dry: 1 hours<br>Hard Dry: Minimum 4 Hours |
| Coverage | 6 sqmtr - 7 sqmtr per Ltr / 2 coats<br>*Actual coverage may vary to the quoted coverage due to factors like skill, surface porosity, tools, site conditions etc * |
| Dilution by Volume | 25% to 30% in 1st coat<br>and 10% in 2nd coat |
| Film Thickness | 140-150 microns in 2 coats |
| Packing | 20 ltr |

## PRODUCT APPLICATION

**SURFACE PREPARATION**

**Washing -** Clean the surface which has to be painted with coir brush and water and ensure that it is free from any loose paint dust, grease and growth of algae, fungus or moth.

**Surface imperfections** - If any like cracks, holes, loose plaster etc should be repaired using white cement and fine sand in proper proportion to stop leakage or seepage in future.

**Precautions** - Do not apply the product if surface is subjected to continuous dampness / Seepage even after due surface preparation or retaining walls or water ponding structures. Allow any human or vehicle movement on the painted surface only after 72 hours. Do not use the product on bituminous or asphalt and any porous surfaces

**APPLICATION**

- Stir the content thoroughly before opening the lid
- Dilute the material as stated in the technical data
- Apply 1st coat of Floor Coat Emulsion as self primer
- Roller / Brush Apply 1st Coat of Floor Coat Emulsion
- Roller / Brush Apply 2nd Coat of Floor Coat Emulsion

## SAFETY FEATURES

- ✓ Store the container with the lid tightly closed in an upright position, in a cool, dry place
- ✓ Keep out of reach of children and away from food, drink
- ✓ May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- ✓ Wear eye protection during application.
- ✓ In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. In case of skin contact immediately wash skin with soap and plenty of water.
- ✓ Get medical attention if irritation develops or persists.
- ✓ Do not breathe vapour or spray.
- ✓ It is recommended to wear suitable nose pad during sanding and surface preparation to avoid -dust inhalation
- ✓ Do not pour leftover paint down the drain or in water courses.
- ✓ In the event of spills, contain spillage using sand or earth.
- ✓ No added Lead, Mercury or Chromium compounds

TECHNICAL AID SERVICE PROVIDED ON REQUEST

ANTI FUNGAL · ECO FRIENDLY · LOW VOC · LEAD FREE

Manufactured by

**GODAVRI PAINTS PVT. LTD.**
Admin Office: Tulsiram Gupta Mills Estate,
Darukhana, Reay Road, Mumbai 400010

For Customer Care contact: 022 23721249

admin@godavaripaints.com
www.godavaripaints.com