


*Coloring Excellence -  
Providing Total Paint Solutions*

**GODAVRI**  
PAINTS

# GODAVRI INTERIOR PRIMER

Godavri Paint's Interior Primer is an interior grade primer which is acrylic based and can be used over any putty or bare surface as a Primer / Sealer for other waterbased top coats like distempers or emulsion paints.

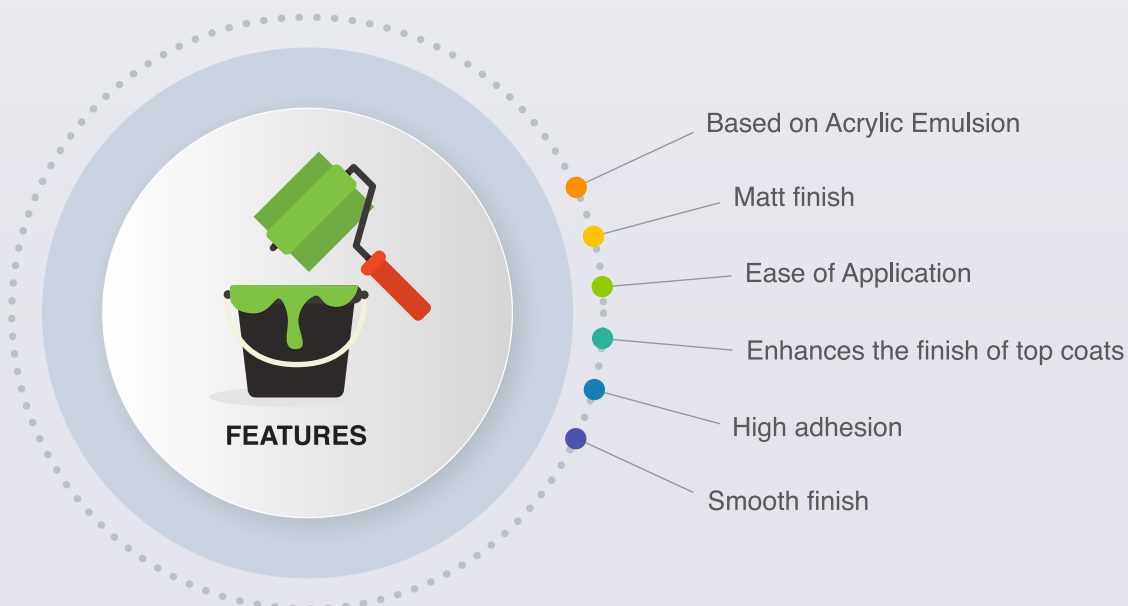

## TECHNICAL DATA

|                       |                                                                                                                                                            |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Area Of Application   | Masonry walls, Fiber board, RCC                                                                                                                            |
| Method Of Application | Brush, Roller                                                                                                                                              |
| Consistency           | Smooth                                                                                                                                                     |
| Finish                | Matt                                                                                                                                                       |
| Recommended Thinner   | Potable Water                                                                                                                                              |
| Viscosity             | 130+10 KU                                                                                                                                                  |
| Drying Time           | Surface dry: 1 hours<br>Hard Dry: Minimum 8 Hours                                                                                                          |
| Coverage              | 8 sqmtr - 9 sqmtr in 1 coats<br>*Actual coverage may vary to the quoted coverage due to factors like skill, surface porosity, tools, site conditions etc * |
| Dilution by Volume    | 60% to 70%                                                                                                                                                 |
| Film Thickness        | 40-50 microns in 1 coats                                                                                                                                   |
| Packing               | 20 ltr                                                                                                                                                     |

## PRODUCT APPLICATION

### SURFACE PREPARATION

**Washing** - Clean the surface which has to be painted with dry muslin cloth and make sure that the surface is free from all loose particles and foreign dusts settled on the walls.

**Surface imperfections** - If any like cracks, holes, loose plaster etc should be repaired using white cement and fine sand in proper proportion to stop leakage or seepage in future prior to application of putty.

**Precautions** - If the surface has continuous seepage or dampness do not apply the product.

### APPLICATION

- Stir the content thoroughly before opening the lid
- Dilute the material as stated in the technical data
- Apply 1st coat Godavri Interior Primer
- Apply 2-3 Coats of Interior emulsions for best results



## SAFETY FEATURES

- ✓ Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- ✓ Keep out of reach of children and away from food, drink.
- ✓ May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- ✓ Wear eye protection during application.
- ✓ In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. In case of skin contact immediately wash skin with soap and plenty of water.
- ✓ Get medical attention if irritation develops or persists.
- ✓ Do not breathe vapour or spray.
- ✓ It is recommended to wear suitable nose pad during sanding and surface preparation to avoid-dust inhalation.
- ✓ Do not pour leftover paint down the drain or in water courses.
- ✓ In the event of spills, contain spillage using sand or earth.
- ✓ No added Lead, Mercury or Chromium compounds.

TECHNICAL AID SERVICE PROVIDED ON REQUEST



Manufactured by

**GODAVRI PAINTS PVT. LTD.**

Admin Office: Tulsiram Gupta Mills Estate,  
Darukhana, Reay Road, Mumbai 400010

For Customer Care contact: 022 23721249

admin@godavaripaints.com

www.godavaripaints.com