


*Coloring Excellence -
Providing Total Paint Solutions*

GODAVRI
PAINTS

PEARL MAX - (INTERIOR) PREMIUM ELASTOMERIC PAINT

Godavri Paint's PEARL MAX INTERIOR is a specialized formulated paint to give the walls a rich look. The product is water based and made with high performance elastomeric grade top of the line elastomeric acrylic modified binders and other performance additives to give the wall a high sheen, enhanced stain and flame resistance.

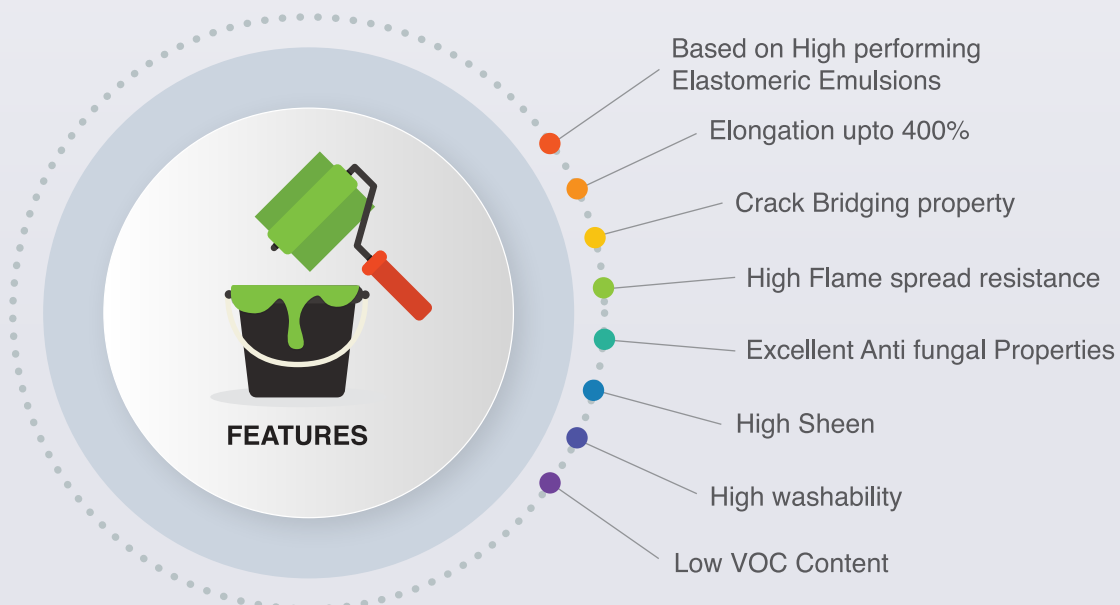

TECHNICAL DATA

Area Of Application	Masonry walls, Fiber board, RCC
Method Of Application	Brush, Roller, Spray
Consistency	Smooth
Finish	High sheen
Recommended Thinner	Potable Water
Viscosity	130+10 KU
Drying Time	Surface dry: 30 minutes Hard Dry: Minimum 4 Hours
Coverage	12-14 sqmtr per lit. / 2 coats *Actual coverage may vary to the quoted coverage due to factors like skill, surface porosity, tools, site conditions etc *
Dilution by Volume	40% to 50%
Film Thickness	110-120 microns in 2 coats
Packing	20 ltr

PRODUCT APPLICATION

SURFACE PREPARATION

Washing - Clean the surface which has to be painted with coir brush and water and ensure that it is free from any loose paint dust, grease and growth of algae, fungus or moth.

Surface imperfections - If any like cracks, holes, loose plaster etc should be repaired using white cement and fine sand in proper proportion to stop leakage or seepage in future.

Precautions - Do not apply the product if surface is subjected to continuous dampness / Seepage even after due surface preparation.

APPLICATION

- Stir the content thoroughly before opening the lid
- Dilute the material as stated in the technical data
- Apply 2 coats of Godavri Acrylic / Cement Putty
- Apply 1 Coat of Godavri Interior Grade primer
- Apply 2 Coats of Pearl Max (Interior)
- Apply 3rd coat of Pearl Max (Interior) as per requirement



SAFETY FEATURES

- ✓ Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- ✓ Keep out of reach of children and away from food, drink.
- ✓ May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- ✓ Wear eye protection during application.
- ✓ In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. In case of skin contact immediately wash skin with soap and plenty of water.
- ✓ Get medical attention if irritation develops or persists.
- ✓ Do not breathe vapour or spray.
- ✓ It is recommended to wear suitable nose pad during sanding and surface preparation to avoid-dust inhalation.
- ✓ Do not pour leftover paint down the drain or in water courses.
- ✓ In the event of spills, contain spillage using sand or earth.
- ✓ No added Lead, Mercury or Chromium compounds.

TECHNICAL AID SERVICE PROVIDED ON REQUEST



Manufactured by

GODAVRI PAINTS PVT. LTD.

Admin Office: Tulsiram Gupta Mills Estate,
Darukhana, Reay Road, Mumbai 400010

For Customer Care contact: 022 23721249

admin@godavaripaints.com
www.godavaripaints.com